

AllMakes4x4



LP 8500 WINCH Pt. No. 1585200

3 Stage, 12 volt Planetary Drive,
Electric Winch Designed for
Powerful, Self Recovery
Recreational use,
(not commercial).

SELF RECOVERY 4x4 WINCH



Roller Fairlead
does not fit to winch -
a Mount Plate is required.



3.8 tonne Single Line Pull, 12 volt

Circuit Breaker assembly forms part of electrical protection, failure to fit will void warranty

Outstanding Features:

- 3.8 tonne single line pull
- Automatic load holding brake.
- 3-Stage steel planetary gear box.
- Freespooling clutch for fast wire rope payout.
- Heavy Duty 4.5hp series wound motor.
- Sealed, Solenoid actuated contactors.

- High tensile wire rope assembly.
- Durable handheld remote.
- Hook handling strap.
- Heavy duty hawse fairlead.
- Fully pre-wired ready to connect.
- Circuit Breaker protected.

Specifications


LP 8500

Rated line pull, (single line)	38 kN (3.855kg)
Motor, 12 volt only	3.37 kW (4.5hp) Series wound.
Gearing	3-Stage planetary
Gear ratio	235:1
Freespooling clutch	Lever action
Braking	Automatic, load holding
Wire Rope Supplied:	8.3mm x 29mtr
Dimensions	533.4mm x 160mm x 218mm
Drum diameter	63.5mm
Drum length	224mm
Weight, Installed	34.5kg
Switching method	Heavy Duty Rubber handheld remote
Switching mechanism	Heavy Duty Solenoid operated contactors
Electrical protection	In-Line Circuit Breaker, (failure to fit will void Warranty)
Hawse Fairlead	Standard
Colour coded wiring	Standard
Pulley Block	Option: 7750
Flatbed mount plate	Option: 56-30163

Performance

Line Pull, kg 1 st layer on drum	Line Speed Metre per min.	Motor Amps 12 volt
0	5.5	84
1134	3.0	156
2041	2.3	215
2948	1.8	270
3856	1.1	320

Dimensions

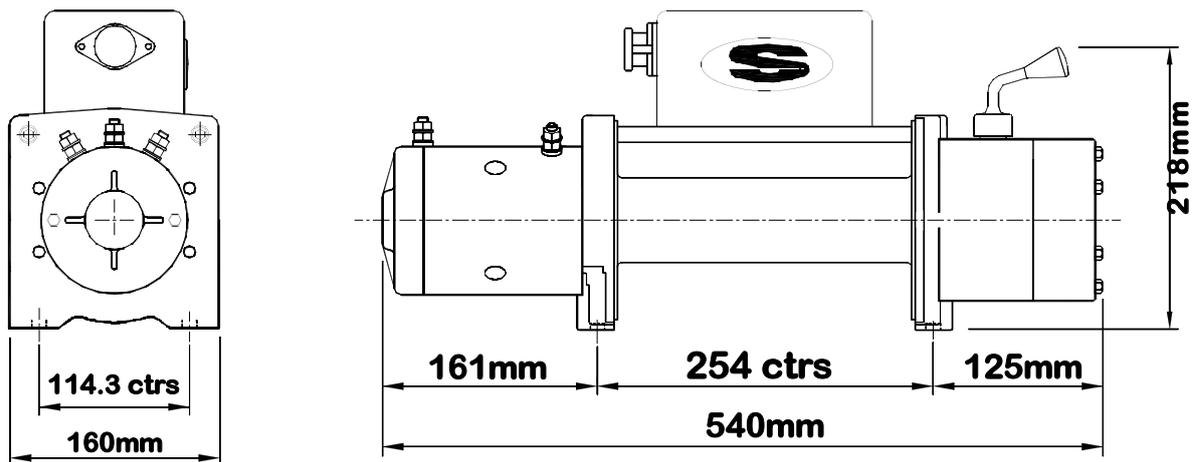

AllMakes4x4

